

# Real Carriage Door Company™



## *Ceiling Mount Opener*

### AOCM

---

Information and specifications


# *AOCM Ceiling-Mounted Automatic Opener*

## **Features:**

The AOCM automatic opener has been in reliable service since 1986. There is no other garage door opener similar to this opener. The AOCM features a unique patented technology: a traveling motor attaches directly to the outswing doors via push rods. There is only one moving part. The motor glides quietly along the stationary track, pushing the doors outward. It is stronger than a chain drive and quieter than a belt drive brought together in one state of the art design.




- **Unique Design & Quiet Operation:** The AOCM features a powerful 24V DC-motor that travels along a stationary chain resulting in extremely quiet operation.
- **Durable:** Extremely durable opener due to the least amount of moving parts of any opener on the market. There is no moving chain or tooth belt and thus there are no wear parts like deflection pulleys.
- **Simplicity:** the motor sprocket is the only moving part (see picture on right).
- **Warranty:** Lifetime warranty on the whole unit and two years on all accessories.
- **Force Adjustment:** Fully automatic force adjustment will not allow a obstructed door to burn out the motor.
- **Smooth Operation:** Soft start and soft stop.
- **Maintenance:** No maintenance needed
- **Safety:** Meets or exceeds UL 325 safety standards.

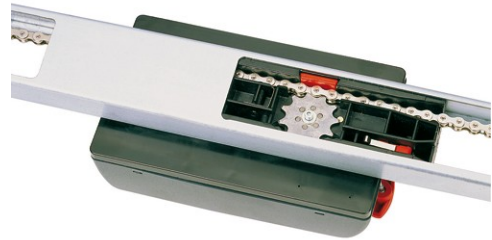

## **Specifications:**

- 800 Newton force (equals 3/4 HP)
- 24V DC Motor, allows up to 70 door movements per hour
- AM 315 MHz, HomeLink® compatible radio frequency
- 4 Button transmitter
- Photo safety eyes
- Wall station

## **4 Button Transmitters:**

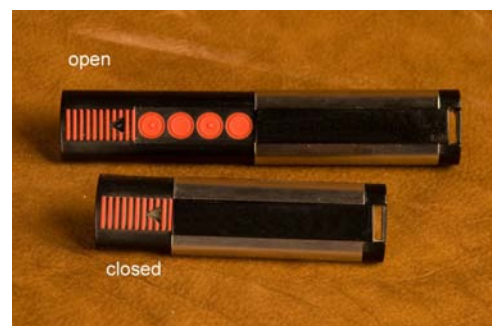

# *AOCM Ceiling-Mounted Automatic Opener*


## **Technical data**

<b>Running time</b>	maximum 30 seconds
<b>Supply voltage</b>	AC 120 V
<b>Rated frequency</b>	50/60 Hz
<b>Storage locations in the radio receiver</b>	20
<b>Lighting</b>	2 x maximum 60 W, standard bulb (not included in the package)
<b>Battery in the transmitter</b>	Type CR 2032, 3 V
<b>Operational temperature range:</b>	-4 °F to +122 °F (-20 °C to +50 °C)
<b>Protection system</b>	IP 20
<b>Working environment based emission value</b>	< 75 dBA – operator only
<b>Max. pulling and pushing force</b>	800 N
<b>Rated pulling force</b>	240 N
<b>Rated current consumption</b>	1.6 A
<b>Rated power consumption</b>	160 W
<b>Max. speed</b>	5.1 in/s (130 mm/s)
<b>Power consumption Standby</b>	approx. 6 W

***Meets or exceeds UL 325 safety standards.***

# AOCM Ceiling-Mounted Automatic Opener

## Dimensions

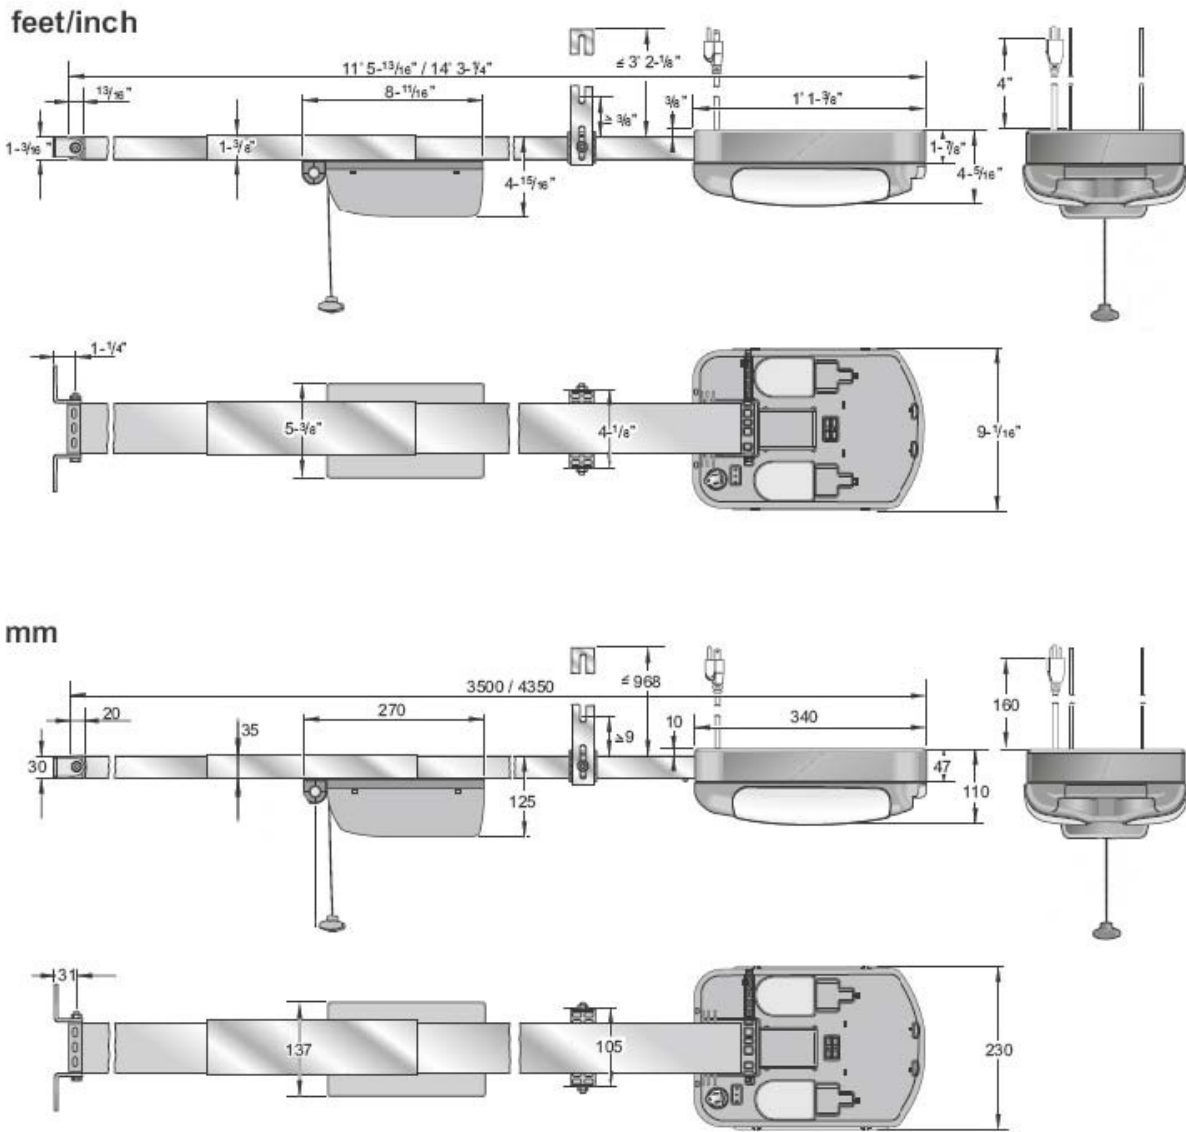

# *AOCM Ceiling-Mounted Automatic Opener*

